



> BRACKET




ITEM: 101001




ITEM: 101005




ITEM: 101004



ITEM: 101003



ITEM: 101006



ITEM: 101002

911 *SIGNAL*®


X6 LED Lighthouse
Security Partner
ITEM: 021101

Micro



180° Light Spread

> MOUNT

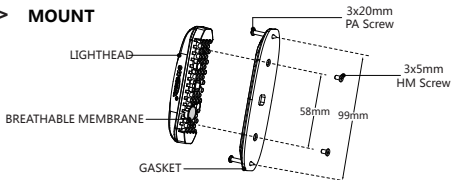


> 19 Flash Patterns

- | | |
|--------------------------|---------------------------|
| 1. Random (Default) | 11. Single (All) |
| 2. Single (Split) | 12. Double (All) |
| 3. Double (Split) | 13. Quad (All) |
| 4. Quad (Split) | 14. Quint (All) |
| 5. Quint (Split) | 15. Ultra (All) |
| 6. Ultra (Split) | 16. Single - Quad (All) |
| 7. Single - Quad (Split) | 17. Single - H/L (All) |
| 8. Single - H/L (Split) | 18. Steady 2 (California) |
| 9. ECE R65 Single (All) | 19. Steady 4 (All) |
| 10. ECE R65 Double (All) | |


> WIRING

- Wire: **RED** — For Power supply to + 10-33V DC
- Wire: **BLACK** — For Ground
- Wire: **YELLOW** — For Synchronization & Flash Patterns
- Wire: **WHITE** — For Simultaneous or Alternating Flash



Note: Flash patterns will be reset when yellow-wire connects to Red-wire more than 3 seconds.

Pattern Synchronization



Pattern Alternately

